

FAST RECOVERY DIODE

ARF260

Repetitive voltage up to

3300 V

Mean forward current

189 A

Surge current

3 kA
FINAL SPECIFICATION

June 17 - Issue: 3


| Symbol | Characteristic | Conditions | T _j [°C] | Value | Unit |
|----------------------|-------------------------------------|--|------------------------|----------------------|------------------|
| BLOCKING | | | | | |
| V _{RRM} | Repetitive peak reverse voltage | | 125 | 3300 | V |
| V _{RSM} | Non-repetitive peak reverse voltage | | 125 | 3400 | V |
| I _{RRM} | Repetitive peak reverse current | V=VRRM | 125 | 50 | mA |
| CONDUCTING | | | | | |
| I _{F(AV)} | Mean forward current | 180° sin, 50 Hz, Th=55°C, double side cooled | | 189 | A |
| I _{F(AV)} | Mean forward current | 180°square, 50 Hz, Th=55°C, double side cooled | | 189 | A |
| I _{FSM} | Surge forward current | Sine wave, 10 ms without reverse voltage | 125 | 3 | kA |
| I ² t | I ² t | | | 45 x 10 ³ | A ² s |
| V _{FM} | Forward voltage | Forward current = 100 A | 25 | 2,37 | V |
| V _{F(TO)} | Threshold voltage | | 125 | 1,95 | V |
| r _F | Forward slope resistance | | 125 | 4,2 | mohm |
| SWITCHING | | | | | |
| t _{rr} | Reverse recovery time | IF= 500A | 125 | 1,6 | μs |
| Q _{rr} | Reverse recovery charge | di/dt= 100 A/μs | | 80 | μC |
| I _{rr} | Peak reverse recovery current | VR= 50V | | 90 | A |
| s | Softness (s-factor), min | | | 0,5 | |
| V _{FR} | Peak forward recovery | di/dt = 200 A/μs | | 14 | V |
| MOUNTING | | | | | |
| R _{th(j-h)} | Thermal impedance, DC | Junction to heatsink, double side cooled | | 95,0 | °C/kW |
| R _{th(c-h)} | Thermal impedance | Case to heatsink, double side cooled | | 20,0 | °C/kW |
| T _j | Operating junction temperature | | | -30 / 125 | °C |
| F | Mounting force | | | 4.5 / 5.0 | kN |
| | Mass | | | 55 | g |

ORDERING INFORMATION : ARF260 S 33


 standard specification VRRM/100

DISSIPATION CHARACTERISTICS



SQUARE WAVE (50Hz)

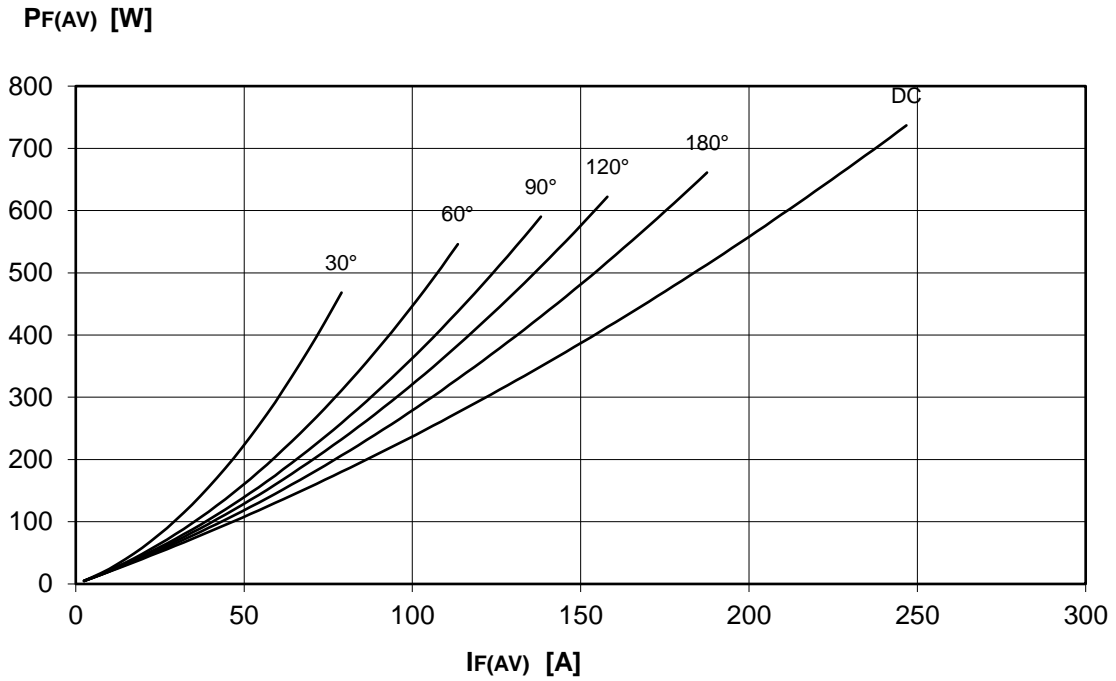


SINE WAVE (50Hz)

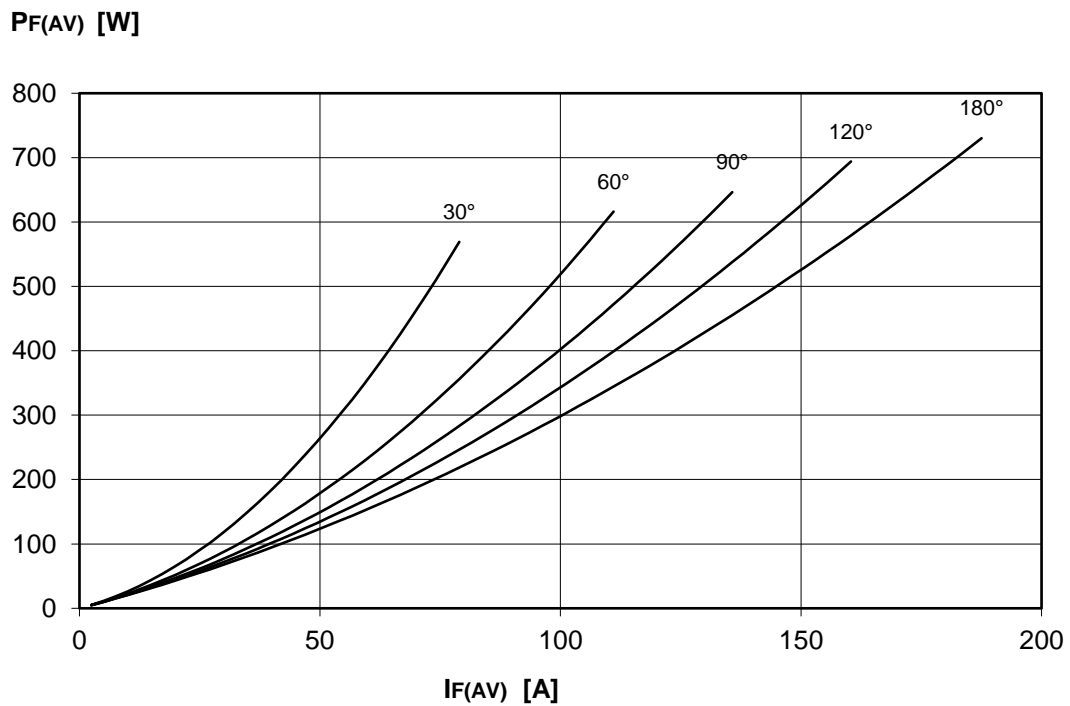


FORWARD RECOVERY VOLTAGE

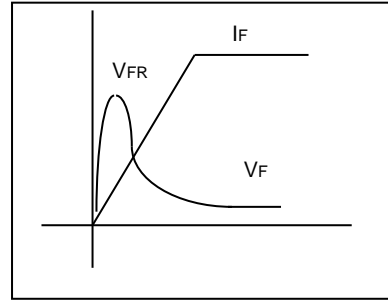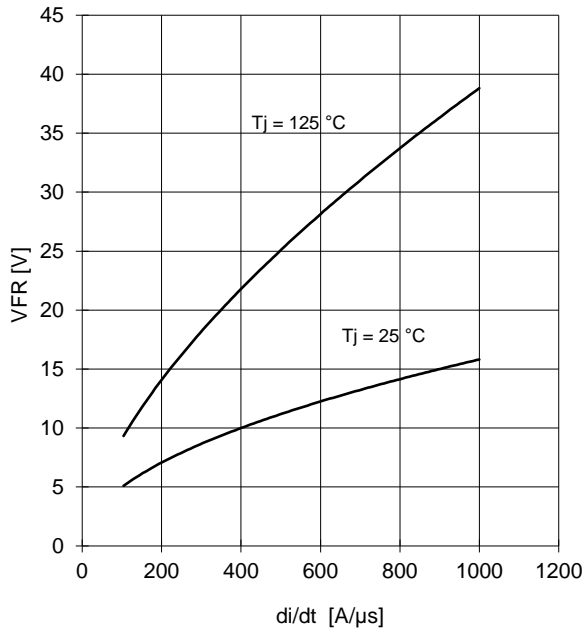

REVERSE RECOVERY CHARGE Tj = 125 °C

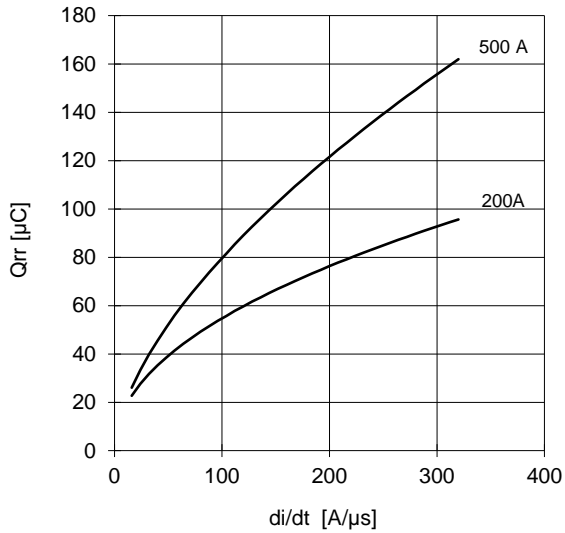


REVERSE RECOVERY CURRENT Tj = 125 °C

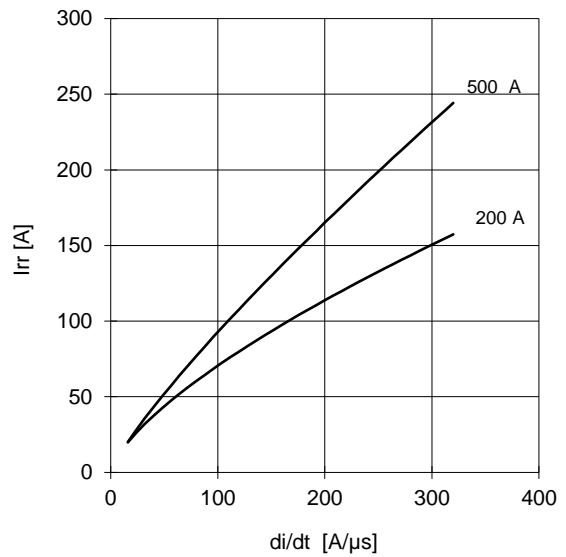

$$t_a = I_{rr} / (di/dt) \quad t_b = t_{rr} - t_a$$

$$\text{Softness (s factor)} \quad s = t_b / t_a$$

$$\text{Energy dissipation during recovery } E_r = V_r \cdot (Q_{rr} - I_{rr} \cdot t_a / 2)$$

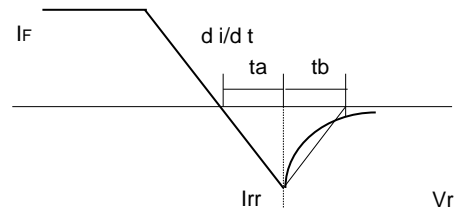


ARF260 FAST RECOVERY DIODE




FINAL SPECIFICATION June 17 - Issue: 3



FORWARD CHARACTERISTIC
T_j = 125 °C

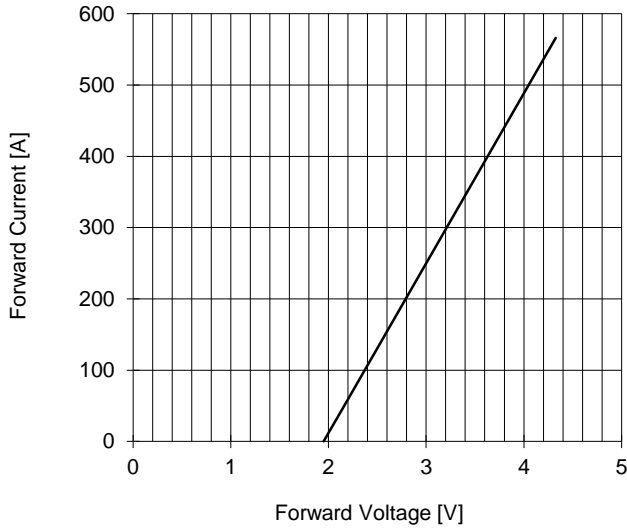

SURGE CHARACTERISTIC
T_j = 125 °C

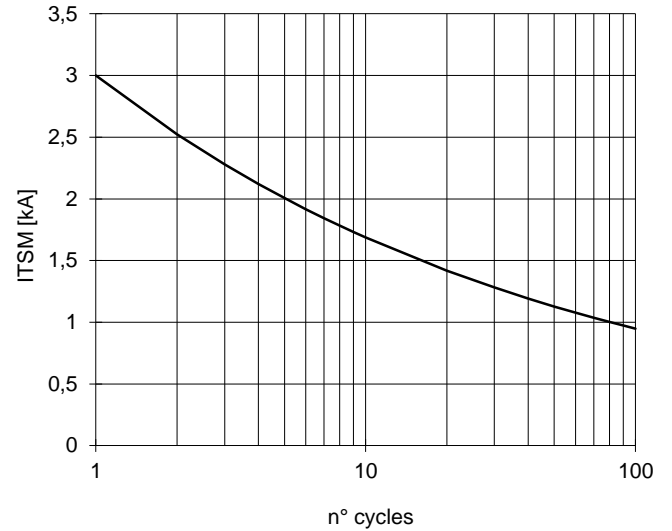


TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

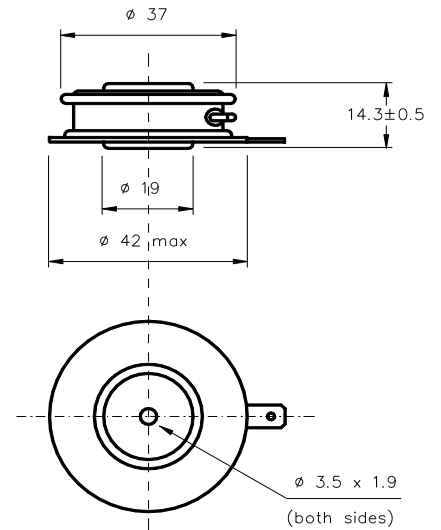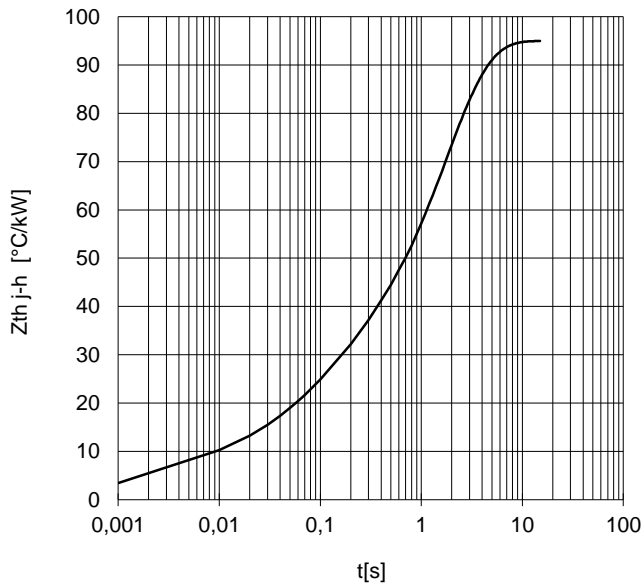

Dimensions
in mm



Distributed by

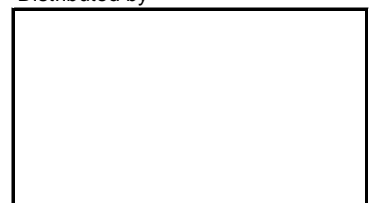

All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 μm. In the interest of product improvement POSEICO SpA reserves the right to change any data given in this data sheet at any time without previous notice. If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.