

RECTIFIER DIODES MODULE

ADD465

Repetitive voltage up to **4000 V**
Mean forward current **471 A**
Surge current **12,0 kA**

FINAL SPECIFICATION

Feb. 18 - Issue: 1



Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		150	4000	V
V _{RSM}	Non-repetitive peak reverse voltage		150	4100	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	150	100	mA
CONDUCTING					
I _{F(AV)}	Mean forward current	180° sin, 50 Hz, T _c =100°C, single side cooled		471	A
I _{F(AV)}	Mean forward current	180° sin, 50 Hz, T _c =85°C, single side cooled		562	A
I _{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	150	12	kA
I ² t	I ² t			720 x 10 ³	A ² s
V _{FM}	Forward voltage	Forward current = 1200 A	25	1,70	V
V _{F(TO)}	Threshold voltage		150	0,82	V
r _F	Forward slope resistance		150	0,600	mohm
SWITCHING					
t _{rr}	Reverse recovery time		150		μs
Q _{rr}	Reverse recovery charge				μC
I _{rr}	Peak reverse recovery current				A
MOUNTING					
R _{th(j-c)}	Thermal impedance, DC	Junction to case, for element		70,0	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, for element		20,0	°C/kW
T _j	Operating junction temperature			-30 / 150	°C
V _{ins}	RMS insulation voltage	50Hz, 1min, circuit to base,all terminal shorted	25	3000	V
T	Mounting torque	Case to heatsink		4 to 6	Nm
		Busbars to terminals		9 to 11	Nm
	Mass			1500	g

ORDERING INFORMATION : ADD465 S 40

standard specification VRRM/100



DISSIPATION CHARACTERISTICS

SQUARE WAVE

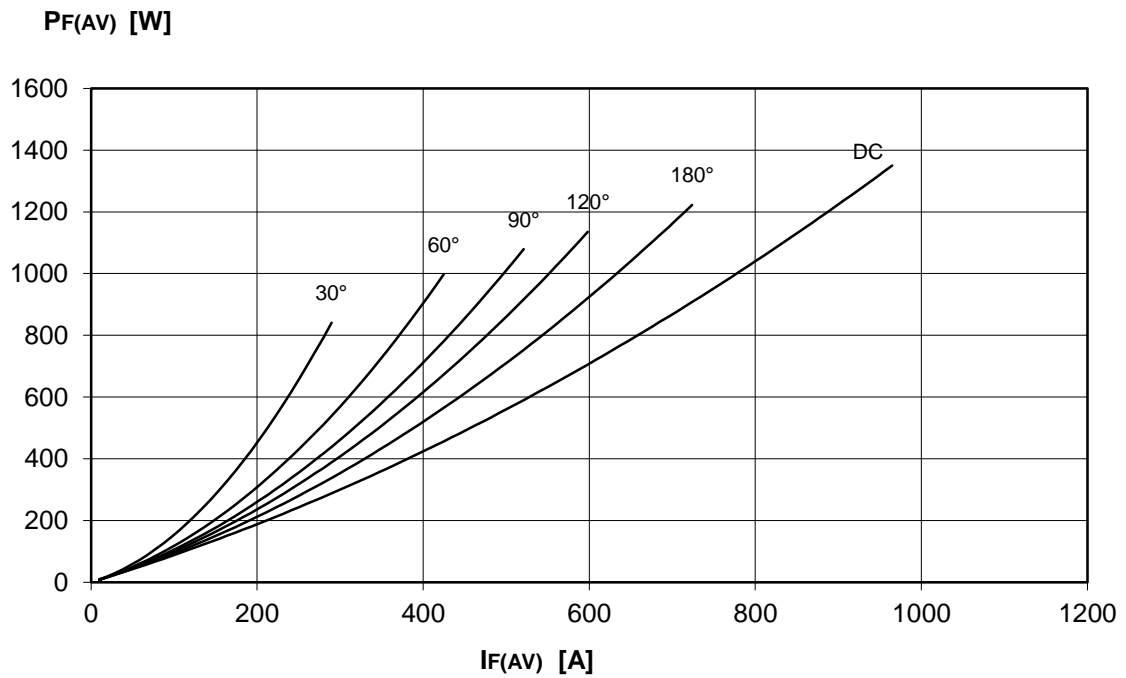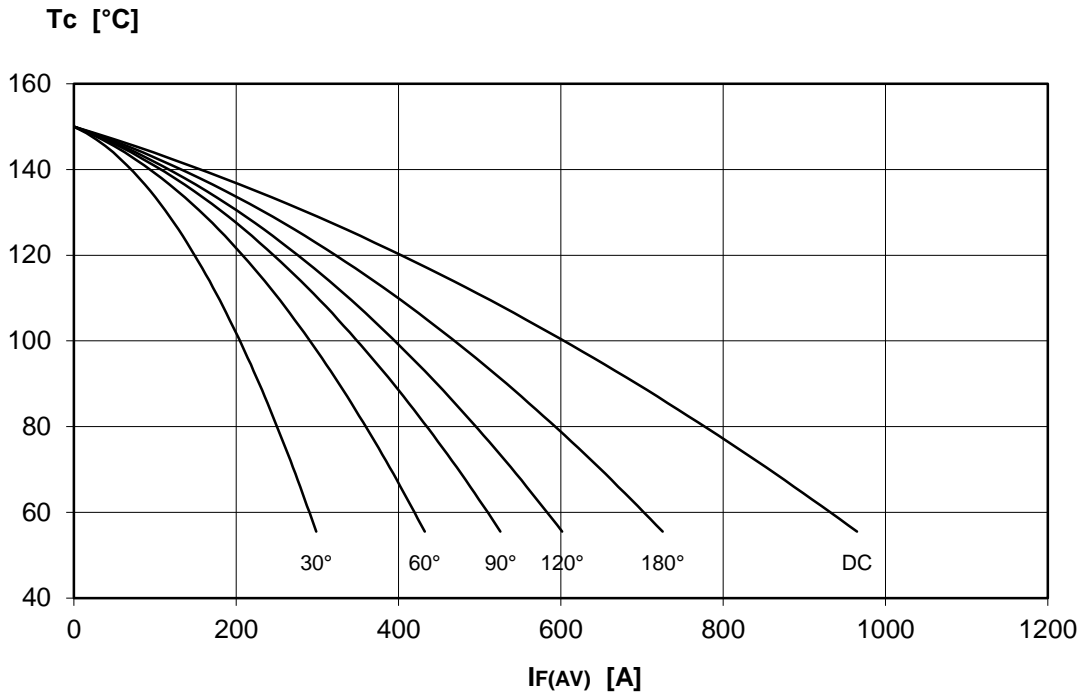

DISSIPATION CHARACTERISTICS

SINE WAVE

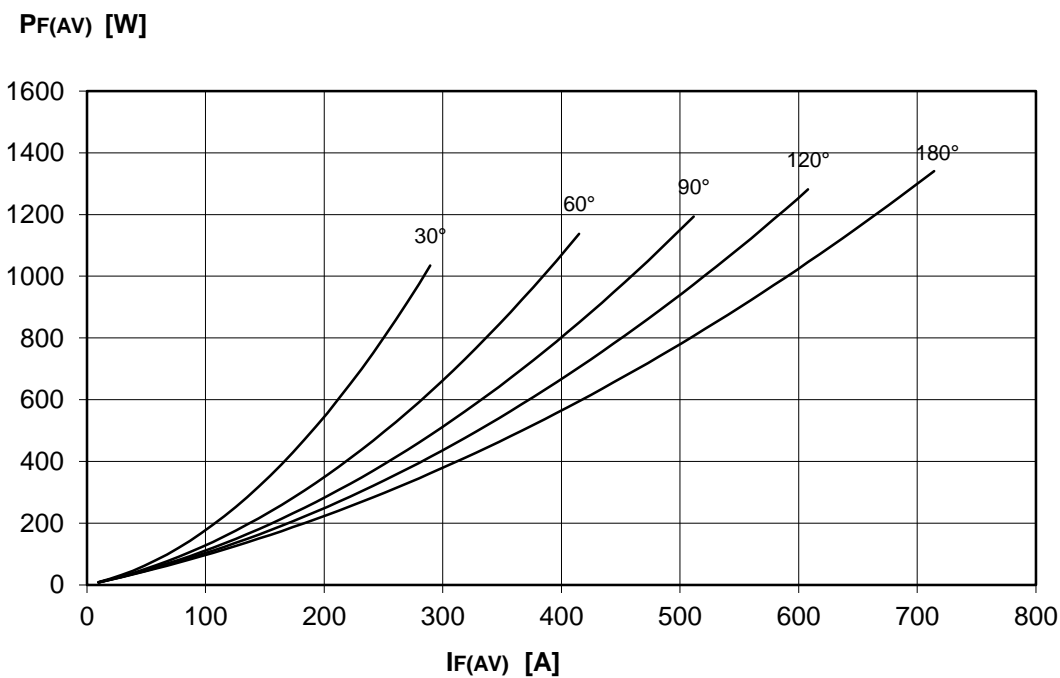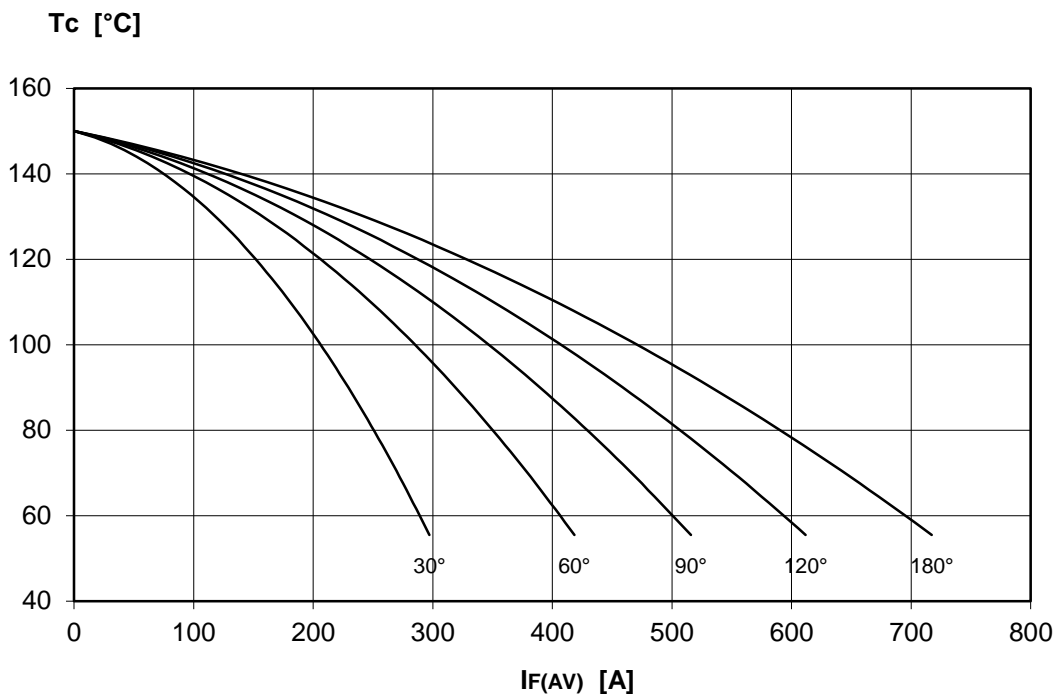


ADD465 RECTIFIER DIODES MODULE




FINAL SPECIFICATION Feb. 18 - Issue: 1




FORWARD CHARACTERISTIC
T_j = 150 °C

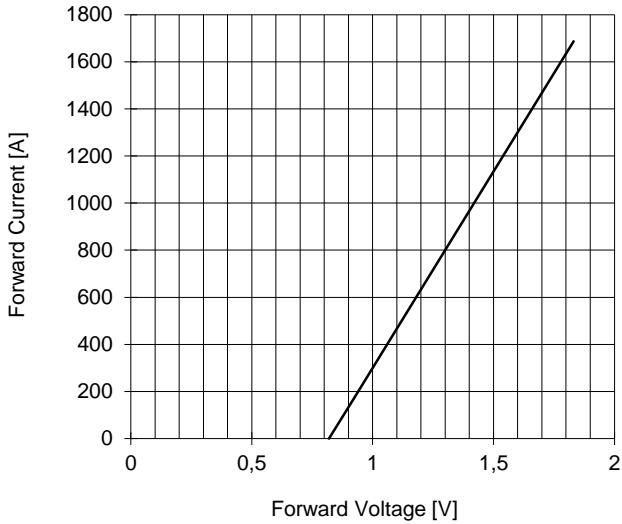

SURGE CHARACTERISTIC
T_j = 150 °C

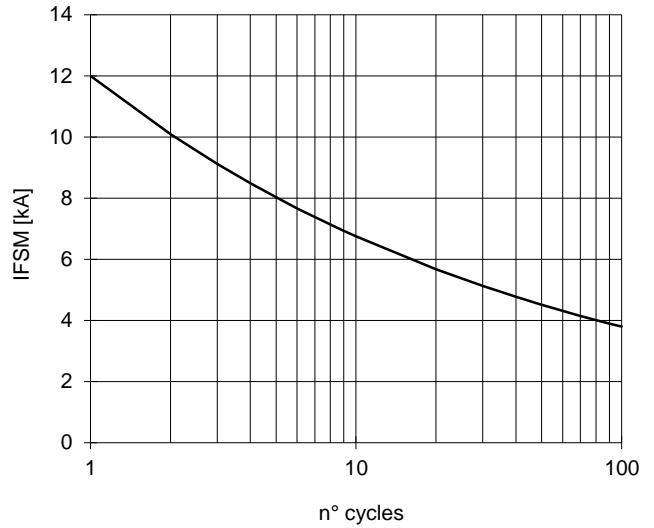

TRANSIENT THERMAL IMPEDANCE

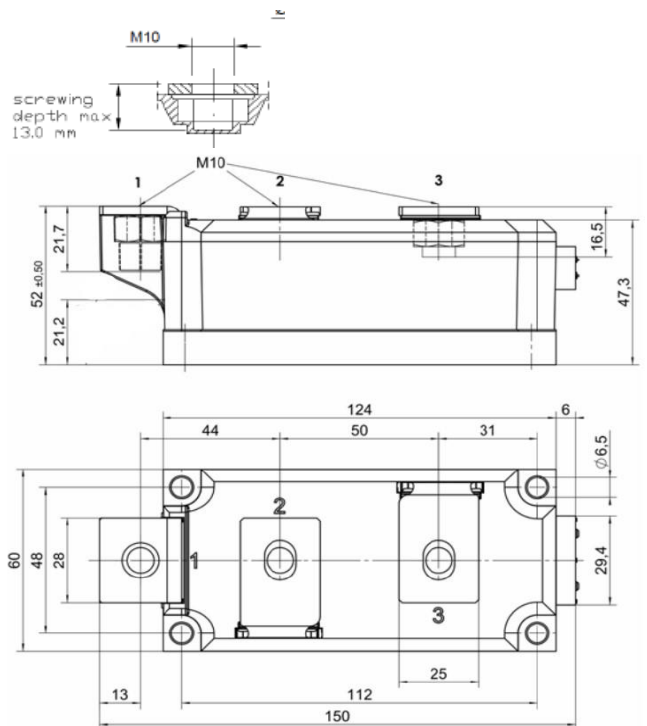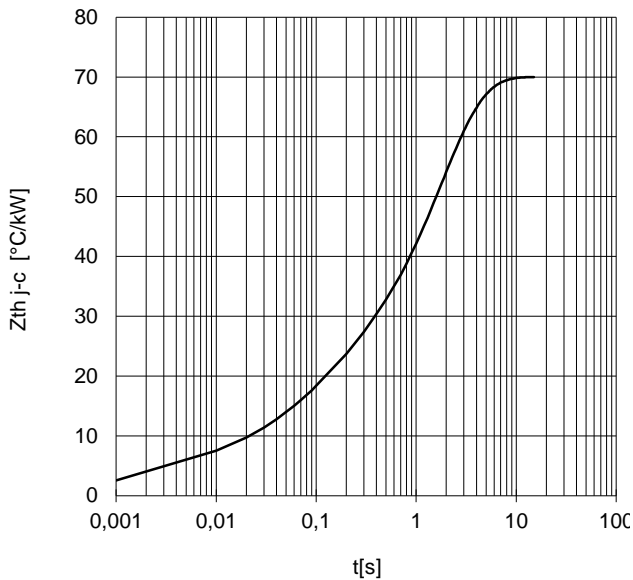

Distributed by

All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 µm.
In the interest of product improvement POSEICO SpA reserves the right to change any data given in this data sheet at any time without previous notice.
If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

