

RECTIFIER DIODE

AR320

Repetitive voltage up to	1800 V
Mean forward current	1315 A
Surge current	10,5 kA

TARGET SPECIFICATION

mar 19 - ISSUE : 1

Symbol	Characteristic	Conditions	T _j [°C]	Value	Unit
BLOCKING					
V _{RRM}	Repetitive peak reverse voltage		175	1800	V
V _{RSM}	Non-repetitive peak reverse voltage		175	1900	V
I _{RRM}	Repetitive peak reverse current	V=VRRM	175	50	mA
CONDUCTING					
I _{F(AV)}	Mean forward current	180° sin ,50 Hz, Th=55°C, double side cooled		1315	A
I _{F(AV)}	Mean forward current	180° sin ,50 Hz, Tc=85°C, double side cooled		1375	A
I _{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	175	10,5	kA
I ² t	I ² t			551 x 1E3	A ² s
V _{FM}	Forward voltage	Forward current =	25		V
V _{F(TO)}	Threshold voltage		175	0,82	V
r _F	Forward slope resistance		175	0,310	mohm
SWITCHING					
t _{rr}	Reverse recovery time		175		μs
Q _{rr}	Reverse recovery charge				μC
I _{rr}	Peak reverse recovery current				A
MOUNTING					
R _{th(j-h)}	Thermal impedance, DC	Junction to heatsink, double side cooled		50	°C/kW
R _{th(c-h)}	Thermal impedance	Case to heatsink, double side cooled		15	°C/kW
T _j	Operating junction temperature			-30 / 175	°C
F	Mounting force			8.0 / 9.0	kN
	Mass			280	g


ORDERING INFORMATION : AR320 S 18

 standard specification VRRM/100


AR320 RECTIFIER DIODE

TARGET SPECIFICATION mar 19 - ISSUE : 1



FORWARD CHARACTERISTIC
T_j = 175 °C

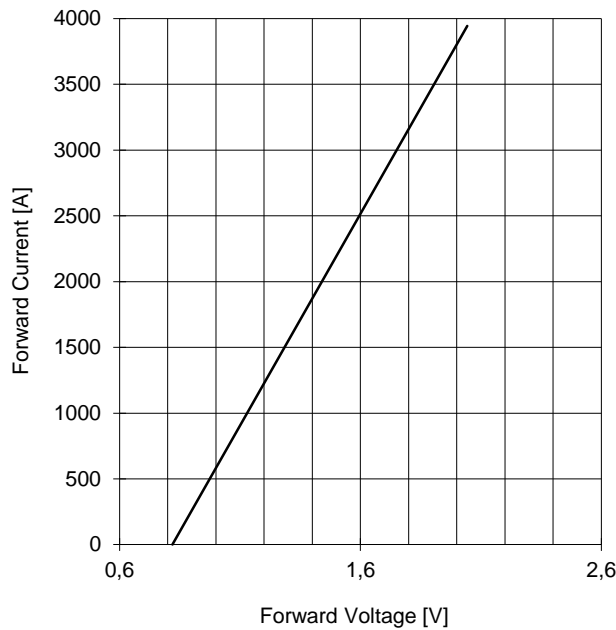

SURGE CHARACTERISTIC
T_j = 175 °C

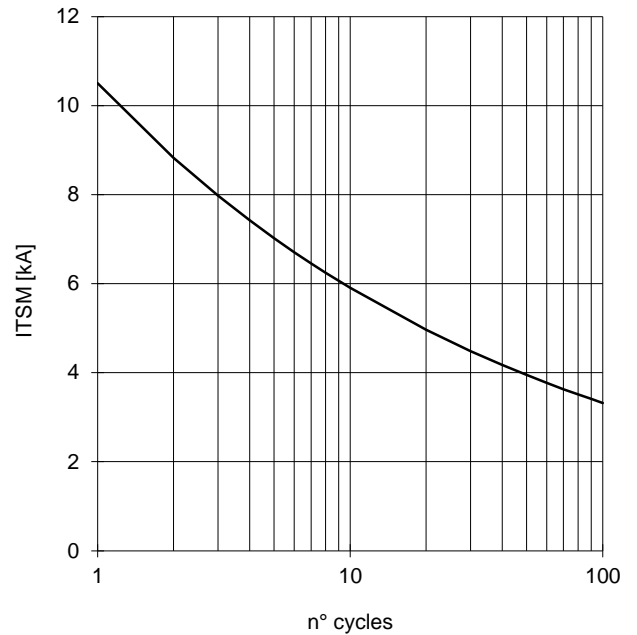

TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

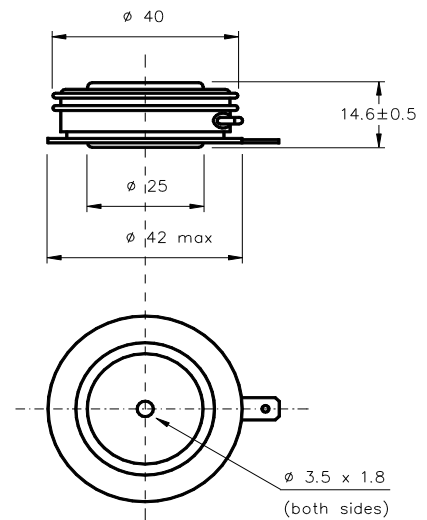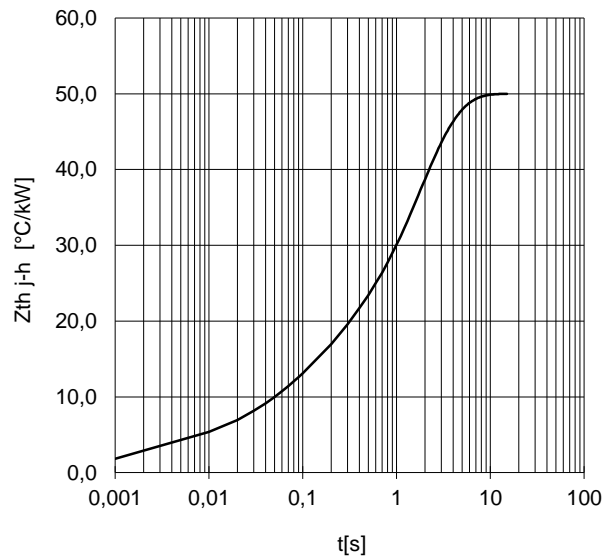

Dimensions
in mm



All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 μm.

In the interest of product improvement POSEICO SpA reserves the right to change any data given in this data sheet at any time without previous notice.

If not stated otherwise the maximum value of ratings (symbols over shaded background) and characteristics is reported.

Distributed by

